




smart
architectural aluminium

Visofold Heritage

Part of the Visofold 6000 series, Visofold Heritage is a high-quality, high-performance sliding folding door, developed to match the slim profiles and Art Deco design of traditional steel doors. Providing a modern, like-for-like replacement for steel materials, Visofold Heritage delivers the exceptional thermal performance associated with modern aluminium systems.

- Classic design with outstanding performance
- Slim lines and discrete hardware maximise light
- Maximum flexibility – minimum space requirement
- U Values 1.5W/m²K using 1.0 W/m²K centre pane
- Weather tested to BS 6375 Part1: 2009 tbc
- Single or dual colour finish, marine quality
- Colour matched accessories available

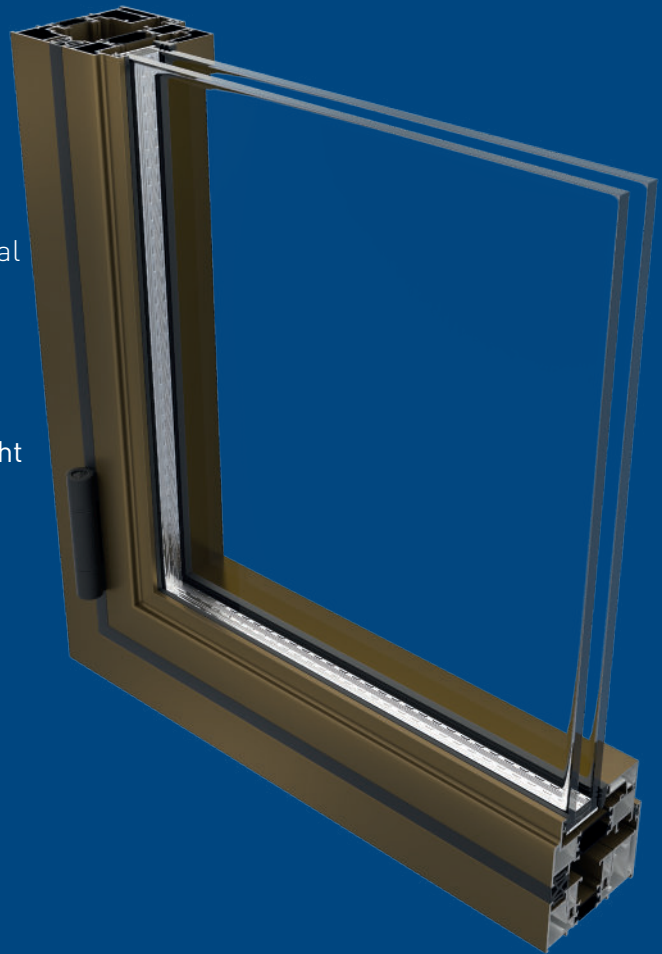

The images illustrate different types of suitable applications for Visofold Heritage and are not binding in detail or specification



BES 668681



FM21582



EMS554307



OHS571955



ENMS634370



Visofold Heritage

Visofold Heritage is ideal for Victorian and Art Deco design projects, providing an elegant solution for both residential and commercial applications. Where large opening apertures are required, the system maximises light and space to give unimpeded views.

The highly versatile, easy-to-operate system is the perfect option for even the largest project, capable of opening up an entire wall, yet presenting a gazed façade when closed.

With high-security glazing, robust locking mechanisms (including multi-point locks on the main opening sashes, and shoot-bolts on the floating mullions), an unrivalled colour range and the option of colour-matched accessories, Visofold Heritage can be tailored to meet each project's specific requirements.


Delivering the perfect combination of classical aesthetics, strength and performance, Visofold Heritage profiles feature a polyamide thermal break that enhances the system's thermal performance as well as high-quality EPDM gaskets and weather brushes to aid weather resistance.

Fully compliant with the requirements of Building Regulations Document L 2010, the doors have the option of either low thresholds for unimpeded, easy access, or rebated thresholds that offer improved weather resistance.

The system features a choice of internally or externally folding panels, which when open, sit flush to the frame. Sashes are hung from a floating mullion and slide on a recessed bottom roller and top guide, which allow ultra-slim profiles, smooth operation and robust security.

Technical Performance

U Value	1.5W/m ² K using a 1.0 centre pane
Air	Class 2, 600Pa
Water	Class 8A, 450Pa
Wind	Class 3, 1200Pa
Document L Compliant	

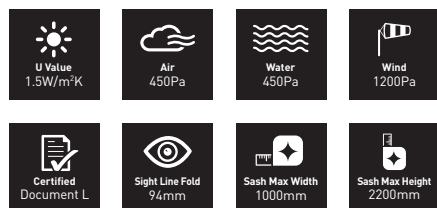


Dimensions

Frame Width	88mm
Frame Depth	76 or 82mm
Typical Sight Line	94mm for Slide and Fold Door
Glass	24, 28, 32 or 40mm double or triple glazed units

Recommended Design Limits

Max Sash Width	1000mm
Max Sash Height	2200mm
Max Sash Weight	100kg

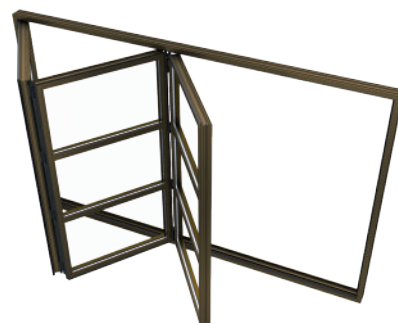

Slide & Fold Door

Why choose a sliding/folding door?

- ◆ Door panels are moved to the side and then swung open
- ◆ Each door can be locked in place anywhere within the opening
- ◆ Slim lines and discrete hardware maximise light
- ◆ Door sashes are moved to the side in a concertina fashion
- ◆ Smooth, easy and reliable operation
- ◆ Slim profiles maximise open space
- ◆ Integrates outdoor and indoor living space